

RM-86E OMNIPOTENCE REMOTE CONTROL ILLUMINATE

USER MANUAL

PRODUCT INTRODUCTION

This remote control of omnipotence in which one the TV for design the market of international , main trait:

★At the base of the TV-106 RC upgrade join the RM-108E brand code.

★It come true without the battery save as the code function (if outside hang EEPROM it come true without the battery permanence save as the code function) it means then without the battery, pressed any one key, this time the set of the code it can be save as 10 hours at least. if then outside hang EEPROM, this time the set of the code it can be save as 20 years at least.


★Originality interface is the RM-108E's, it can be make use the own function of speedup original code , carry through orientation of exact to the only code, solve the Originality interface is the RM-108E RC , the limitation consist of in the course of use it can't sensitive response

★Function: Manual input code's self-motion search code(Single code excursion)Identify code(revert to leave factory setup)Originality code speedup/Test code

KEY-PRESS DESCRIPTION

1. The key-press illuminate

This remote control in all 36 key, parting as follows: 1 set key, 35 function key.

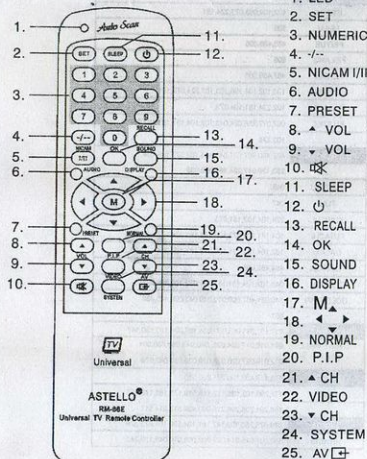

SET REMOTE CONTROL

2. Operate style:

※In all 7 sorts style: Manual input code. Self-motion search code. Single code excursion. Identify code . Revert to leave factory setup. Originality code speedup. Test code

※Model1. Manual input code: SET + PWR ----> XXX

1. press the set key simultaneously press the power key , until the led light, loosen the set key and power key.



2. input the 3 digit code , the glint once per input the once numeric key ; if you input the key is non-numeric key the RC not read the data of this 3digit code. please keep on the 3digit code with input.



3. then input the 3 digit code, the led die, achieved setup and exit.



4. At the midway of anytime you want exit, you can press the set key (then 15 secs no press the other key , the RC self-motion exit)



※Method 2: Self-motion search code: SET (5secs) ----> V+ (V-) ----> SET

1. press and hold the set key about 5secs , until the led light, loosen the set key, this time the search function to start.



2. press the vol+/- key, switch the orientation, then at one time shall the code plus one (minus one) , this time the RC issue the new code of corresponding the vol+/- key ; self-motion renewal the code, again issue the code then 1.5secs



3. press the other key it can be pause search , then pause you can press the other key besides of search key in order to check the function of the other keys, then you can again press the vol+/-key , it continue self-motion.



4. when the screen of tv , press the set key save as and exit , then 15 secs no press the other key , the RC self-motion exit.



※Method 3: Single code excursion: SET ----> TV/AV (5secs) ----> SET

1. press the set key, then loosen it.



2. press and hold the TV/AV key about 5secs. then start to search, the RC issue to the code corresponding to the tv/av key.



3. When the tv appear switch menu of TV and AV, loosen the TV/AV key, (this time the RC still aim at the tv), when the TV appear switch menu of TV and AV again, loosen the set key, it save as and exit.




※Method 4: Identify code: SET + 1/2/3

1. press and hold the set key, simultaneously press the numeric key 1 (2,3) , loosen the set key, the led glint times leave each other the hundreds numeric of the code (tens, ones), the led not glint, it means the numeric is 0




※Method 5: revert to leave factory setup: SET + 0 (5secs)

1. press and hold the set key, simultaneously press the numeric key 0, then the led light about 5secs, loosen the set key, the led glint 3 times, the RC come back revert to leave factory setup.



2. at leave factory estate, issue compages code.



※.Method 6:Originality code speedup:DISP(5secs)

1.at Original estate,press and hold the DISP key about 5secs, start to search.



2.then the RC self-motion renewal again, about 1.5 secs the RC issue code again.



3.when the screen of the tv appear sign of vol+ ,loosen the DISP key ,it save as and exit.



※.Method 7:Test code: SET+9

1. press and hold the set key, simultaneity press the numeric key 9,come into the test code estate.



RM-86E LIST CODE

TV BRAND	Code
ADVANCE	104,120,102,106,103,187,181,224,073
ADVANTE	181,220,102,104,181,224,073
AICO	470,022,104,181,187,073,103,106,025,224
AIWA	009,067,058,102,104,181,224,073
AKARI	013,460,448,015,102,104,181,224,073
AKIRA	400,461,470,471,016,115,102,178,045,224 181,073,104,147,151,024
AOLINPIKE	487,489,506
ANHUA	484
AOLINPU	490
ASANO	061,102,104,181,224,073
ASATRON	073,058,053,102,104,106,103,187,181,224
AUDITONE	181,102,103,131,187,073,104,025,224,073
AUITECH	102,187,120,104,181,073,224
AVANTE	181,102,187,104,224,073
BAIHUA	487,489,505,506
BAIHEHUA	485,486
BAILE	505
BAOSHENG	505
Baohua	487,489,506
BAZOOKE	047 (11253,180,083,120,024,147,000
BEIJING	495,496,487,488,505,506
	281
B/E(Mesin TV)	102,104,106,103,187,181,073,224
BIG BEAUTY	017,151,253,152,147,224,000
BLUEBELLA	000,290,053,023,043,102,104,181,224,073
BLUESKY	053,102,187,027,043,104,120,024,181,224,073
BOMBA	058,088,073,102,104,060,187,181,224,073
CASINO	151,017,152,180,053,120,024,147,253,000
CAILING	489
CAIHONG	505
CAIXING	485,486
CHANGCHENG	484,485,486,487,489,505,506
CHANGHONG	002,405,477,353,422,014,091,182,128,464,470 471,408,469,467,472,473,089,474,340,347,343 344,345,006,009,092,093,102,104,181,224,073 010,011,016,028,028,053,051,052,057,058,067 071,086,087,088,100,159,162,183,184,226,481 487,484,505,531,569,567,568
CHANGFENG	485,487,489,506
CHANGFEI	505
CHANGHAI	505
CHINA TV	102,104,181,224,187,073,131,025,250

TV BRAND	CODE
TV Buxian China	488,489,475,464,471,469
CHUNLAN	142,186,208,102,104,187,181,224,073
CHUNFENG	487,489,506
CHUNGLIN	506
CONROWA	481,487,489,492,509
CHUANGJIA	492
QICH	078,118,034,086,027,224,054,120,053,104 102,187,073,187
CLARION	034,043,102,104,181,224,073
CRYSTAL	337,102,104,131,181,224,187,073,103,106
DAEWOO	042,013,021,102,104,181,224,073
DETROIT	053,212,102,104,131,181,187,073,103,106,224
DACHI	024,043,102,104,131,181,187,073,224,103
DAZZ	120,102,104,181,224,073
DAIKEN	073,224,102,104,181,224,073
DIOMEDIA	102,104,131,181,187,073,103,224,106,025
DJONGJIE	492
DONGDA	505
DONGHAI	505
DIGITEC	020,151,017,147,483,508,509 253,102,024,150,053,120,043
DITITEC	483,DIGITEC lateral fly
DITITEC 123	147,151,000
DITITEC 323	147,151,000
DISCSTAR	486,151,002,102,104,181,224,073
DIVA	030,147
ETRON	102,104,053,073,224,181
FEILU	505
FEIYUE	485,486,505
FEILANG	505
FEIYAN	487,489,506
FORTUNE	120,102,104,106,103,187,224,073,181
FUJICOM	102,224,181,104,073
FUJITEC	067,077,258,024,043,102,104,131,187,073 103,224
FUJI ELECTRIC	482,483,487,024,043,443,102,077,189,104 253,102,077,224,181,073,032
FUJITSU	048
FUJI	047
FURICH	224,104,102,181,073
FUTACHI	104,181,102,073,106,131,181,224
GALAXI	102,104,181,131,106,073,187,103,224
GANXIN	484,485,486
GENERAL	045,102,104,131,181,187,073,103,106,025
GOLDSTAR	140,024,467,009,019,040,043,098,485,486 507
GRAND MASTER	017,151,253,053,000,024,152,024,150,126,147
GREAT WALL	011,016,017,024,025,040,043,053,069,001 012,019,027,028,028,029,030,031,042,079
GRUNDIG	478,479,480,150,201,280,080
HAIER	173,296,103,105,112,118,119,175,185,186,187 188,201,205,206,216,000,499,513,514,517
HIMIDA	078,075,250,102,187,181,104,190,101,073,224
HITACHI	187,207,015,014,027,008,008,010,048,178,240

TV BRAND	CODE
	481,485
HITACHI FUJIAN	007,187,102,104,181,224,073,011,015,014,004
	028,053,034,040,043,053,056,006,008,010,048
	179,050,011,055,079,488,487,489,490,491,495
	506
HUI JIA(Main Tv)	102,187,104,224
HUIFA	309
HUIR	489,506
HUANGHE	485,486,506
HUANGHONG	487,489,506
HUANGHONG	506
HUANGSHAN	485,486,487,488,506,506
HAYAN	485,486,487,489,506
HAIRONG	506
HUANYU	011,015,024,040,043,053,056,006,957,958,079
	485,486,487,506
HONGMEI	485,486,506,506
HONGYAN	489,506
HUANGLONG	486
HUODAJIA	504
HISENSE	006,007,008,010,014,015,025,135,045,042,103
	105,107,115,116,128,129,130,131,138,171
	172,173,174,185,186,187,188,189,190,191,200
	301,302,303,304,305,306,307,308,309,310,311
	481,496,496,514,515,516,529,535,536,537,538
	540,549,550,556,571,572,576
HONGSU	131,188,036,102,104,181,224,073
ICH	085,186,102,PIP,034,086,027,054,120,053,104
ICHIBAN	017,151,253,000,152,024,147
ICHKO	104,102,187,181,131,073,224
IKAWAGUCHI	102,104,131,181,187,073,103,106,025,224
INDOTEC	120,102,104,181,224,073,250
INTEL	013,213,102,104,181,224,073
ITAMI	051,486,486,470,464,471,467
ITECH	181,102,104,224,073
IMPERIAL	487,489,506
ICWIN	
JENSONIC	120,102,104,181,073,224
JOHNSON	024,043,102,104,224,073
JINSHENG	120,102,104,181,073,053,224
JINXING	484,486,489,470,471,483,486,487,492,495,506
	521
JONIA	131,102,104,181,187,073,224,103,106,025
JVC	161,004,089,024,156,336,337,338,339,340,342
JIALICAI	487,486,505,506,513
JINGXINBAO	496
JIAN SHENG	496
JULIA	485,486,497,489,506
JINTA	487,489,505,506
JINQUE	489,506
JINQUE	506
JIAHUA	484,487,519
KANSILIR	120,102,104,181,224,073
KASIMI	104,102,106,103,187,073,224

TV BRAND	CODE
KAWACHI	104,102,181,187,073,224
KANGE	485,486,487,489,506,506
KANGDI	487,490,506
KANGYI	487,489,506,506
KANGSI	485,486,505
KANGWEI	486
KUJALE	487,489,505,506
KUNLIN	487
KCL	053,102,104,181,224,073
KUMURA	065,486,489,470,464,471,467
KONGQUE	485,486,487,505
KONKA	073,031,151,167,102,104,181,224,011,017,073
	039,032,034,054,067,069,071,076,077,078,079
	080,107,117,163,164,165,177,210,312,313,314
	315,316,317,318,319,320,330,484,489,497,509
	511,525,526,527,532,533,534,552
	554,555,575
KOREA	102,187,104,181,073,224
KOSIMA	025,024,043,102,104,181,224,073
LASER	024,043,102,104,181,224,073
LENSA	053,102,104,181,224,073
LILIPUT(LCD)	487,486,489,470,464,471
L.O. Flatron Plasma	140,457,024,040,043,256,260,261,043,480,507
LUCKY STAR	073,224,102,104,181,106,106,103,025,131,187
LONGJIAN	487,489,506
MAGIC STEREO	147,151,017,233,159,024,100
MAROTEC	120,102,104,181,224,073
MITOCHIBA	102,104,181,224,131,187,073,103,106
MATSUJI	120
MAYACA	120
MAZDA(Main Tv)	102,104,106,103,187,224,073
MESIN TV	102,104,224,103,106,024,073
MEILE	485,486,487,489,506
MENGMEI	486,489
MUDAN	482,487,489,505,506
MINIMAX	147,151,017,233,152,000,024
MITSUBISHI	011,051
MITZUNO	120,102,104,106,103,187
MODERN	024,043,102,104,181,224,073
MULTI MAX	486,489,470,464,471,467,096
NAKAI	104,102,181,131,187,073,103,106,025,224
NATIONAL	020,011,014,015,021,022,059,089,089,089,089
NAHOTECH	486,489,470,464,471,467,096
NANGHENG	487,489,506
NEC	068,140,006,011,016,004,025,053,056,024,079
	487,489,505,506
NEC	507
NEI	470,404,471,468,405,467
NANBAO	487,489,505,506
NYCAM	147,151,152,150,253,017,000
INDAI	102,187,104,181,224,073
NIKAI	120,073,187,131,181,102,104,103,106,025,224
NIKO	073,102,187,104,224,073,181
NIKON	006,057,058

TV BRAND	CODE
NITECH	486,489,470,464,471,467,096
NORDMENDIE	214,227,330
NINJA	147,017,151,253,152,150,150,024,000
OKWEL	017,151,253,152,150,147,463,024,023,000
OLYMPIC	104,053,102,187,024,043,181,120
ONOMURA	465,469,470,464,471,467
OTRE	468,469,470,464,471,467,096
P2527	024,043
PANASONIC	002,001,014,015,021,022,059,089,089,089,089
	482
PANDA	001,011,016,021,022,024,025,026,028,033,040
	043,063,066,069,067,058,051,062,073,079,089
	081,081,124,125,181,203,204,206,063,162,222
	485,486,487,489,492,505,506,578
POLYTRON	510
PERSONIC	468,469,470,464,471,467
PHILIPS	024,039,040,043,141,241,242,174(-PIP),
	483,485,486
PLASMA	181,104,102,131,187,073,103,106,224,025
PLY-PM1490	151,152,150,253,017,000
POLYTEC	120,102,104,224,181,073
POLYTRON	147,151,017,463,000
	253,152,024,150,053,120,043
POLYTRON	4803(POLYTRON Internet 9)
POLYVISION	017,151,150,147,024,000,152,483
PRIMA	053,073,102,181,104,224
PROTEC	120,102,104,224,181,073
QUATRO	468,469,470,464,471,467,096
QINGDAO	487,488,489,506
RCA	240,251,033,080,280,221,252,256,257,264,270
ROADSTAR	120,102,104,224,181,073
ROWA	011,016,024,025,040,043,098,127,056,182,267
	493,485,486,505
RUIHI	486
RWMPDS	501,502,203,504
RHCNG	181
RUYI	011,015,024,040,043,486,486
SAAB	102,104,181,131,187,073,103,106,025,224
SAIJO	102,104,106,181,131,073,103,224
SAIGE	011,025,016,102,104,224,181,073
SAMSUNG	050,467,024,008,011,016,021,025,037,038,040
	043,053,051,051,123,113,486,487,487,505
SANEX	086,102,181,104,224,073
SANKBI	082,102,104,224,181,073
SANKEN	054,118,467,476,476,258,040,215,181,102,223
SANSUI	120
SANSYO	089,223,008,008,007,014,015,035,053,056,079
	105,132,133,134,202,481,487,489,506
	518,582,583,584
SEMRO	104,102,181,131,073,187,106,106,103,224
SHANGHAI	009,011,016,017,022,024,025,040,043,053,056
	057,058,079,123,484,485,486,487,489,505
	506

